
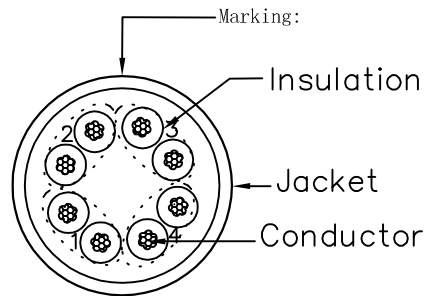


DATE	REV	DESCRIPTION	BY	CHKD
3/20	A/0	NEW	WZY	YZG

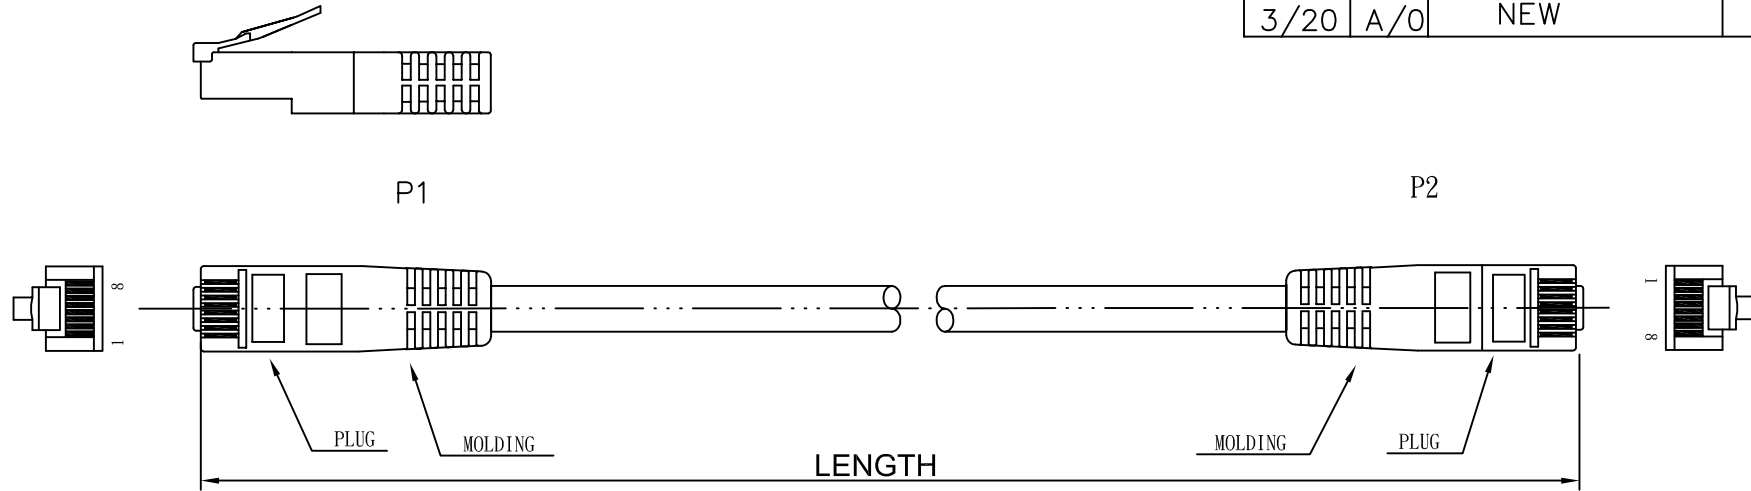

orange 1	green 2
white/orange	white/green
blue 3	brown 4
white/blue	white/brown

PA/R	PINOUT		
	P1 (T568B)	WIRE	P2 (T568B)
1	1	WHT/ORG	1
	2	ORG	2
2	3	WHT/GRN	3
	6	GRN	6
3	4	BLU	4
	5	WHT/BLU	5
4	7	WHT/BRN	7
	8	BRN	8

Conductor	Bare Copper 24AWG 7.0.196±0.015mm
Insulation	Thickness:MIN at any point:0.20mm MAX AVG:0.25mm Diameter:0.98±0.06mm
Jacket	LSOH Thickness:MIN at any point:0.55mm MAX AVG:0.65mm Diameter:5.9±0.15mm

Wire	CAT. 6 UTP LSOH STR 24AWG*4P
Plug	YUS-01 8p8c 50U"
Length	0.5M
Color	GRAY 852

Unless specified on the drawing, tolerances are per the follows:

.	± 1
.X	± 0.2
.XX	± 0.05

3RD

<b>AVEC CO., LTD</b>					
DRAW.NO	00315	ITEM	C6UL0050		
DEPARTMENT	R&D	DRAW	WZY	DATE	2009/3/20
SCALE		CHECKER		APPROVAL	
UNIT	MM	SHEET	1	OF	1